


# H33 - Housing Series

EASY INSTALLATION ■ TOTAL EXTREME WEATHER PROTECTION ■ SPACE FOR LONG RANGE ZOOM LENSES

## PRODUCT DESCRIPTION

The H33 is Salley's largest innovative weatherproof housing suitable for both outdoor & indoor installations. Made of a high-resistance ABS/Nylon material, it guarantees complete protection against all environmental conditions, as well as being impact-resistant. The H33 allows you to choose various fitting cameras and lens and to apply a range mounting brackets - aluminium or nylon and its internal dimensions are large enough to fit a transformer and/or radio transmission device. The latest product development is the addition of a bracket **which totally hides and protects the cable**, whilst the external cable glands have been kept for greater adaptability.



**NO HEATING REQUIRED**



**NO COOLING REQUIRED**

## APPLICATIONS

- Large outdoor/indoor areas
- Extreme climate conditions
- Wash down applications
- Acid/Alkali environment proof
- Industrial Applications



## PRODUCT OPTIONS

- Colours Available: RAL 9002/Black
- CCD Camera quoted upon request
- Different available brackets
- Cable quoted upon request

**Inside H33 : Space for extra-zoom lens, transmission modules**

Specifications are subject to change without notice.

**FOR FURTHER INFORMATION ON THIS PRODUCT CONTACT SALLEY OR YOUR DISTRIBUTOR**

Your distributor is:

[info@salleycorp.com](mailto:info@salleycorp.com)  
[www.salleycorp.com](http://www.salleycorp.com)  
Tel. +39 0444 550 520  
Fax. +39 0444 550 320

# H33 - Housing Series

EASY INSTALLATION ■ TOTAL EXTREME WEATHER PROTECTION ■ SPACE FOR LONG RANGE ZOOM LENSES

## TECH SPECIFICATIONS

| MODEL SPECIFICATIONS                        |                             |
|---|-----------------------------|
| Model number                                | H33                         |
| Weight (unpacked and not including bracket) | 1.7kg (3.32lb)              |
| IP Rating                                   | IP 66                       |
| Housing Enclosure                           | Injection Molded ABS/Nylon  |
| Internal Heating/Cooling Element            | Not required                |
| Operation Temperature                       | -20°C to +50°C              |
| Lens/Window                                 | Flame retardant VO-Margard  |
| Colours                                     | RAL9002                     |
| DIMENSIONS                                  |                             |
| External (mm)                               | 405(L) x 160(w) x 140(H)    |
| Internal (mm)                               | 345(L) x 128(W) x 83/108(H) |
| Useful Internal Dimensions (mm)             | 320 (L) x 120 (W) x 100(H)  |

Note: Max temperature -20°C. Special cabling should be used for operating temperature below -20°C.

## AVAILABLE ACCESSORIES

3 PG9 Nylon Cable Glands – for external connection cables

Camera Mounting Plate & Screws

**New H33 Bracket – cable cover and hidden** or


Multi-positioning joint adjustment B9 Mounting Bracket or

AB Aluminium wall Mounting Bracket

## CAMERA RECOMMENDATIONS

All conventional CCD Cameras with extra zoom/varifocal lenses (refer to useful internal dimensions in Technical Specifications on this page) Specific quotations and recommendations available upon request.

## TECH DRAWING

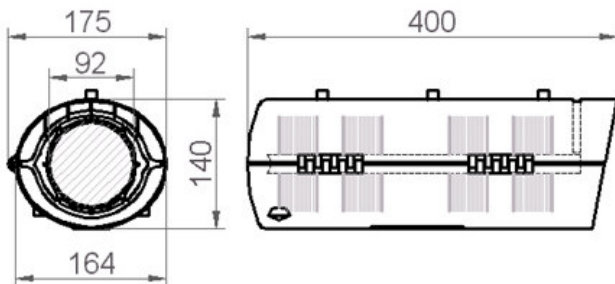

## SALLEY GUARANTEE

All products have been produced using CE-certified material. Salley Corporation offers a 12-month guarantee exclusively for any defects arising from the manufacturing process and only for products manufactured by Salley. Salley is not liable for damages and defects arising from third party products or actions.

Specifications are subject to change without notice.  
**FOR FURTHER INFORMATION ON THIS PRODUCT  
CONTACT SALLEY OR YOUR DISTRIBUTOR**

Your distributor is:

[info@salleycorp.com](mailto:info@salleycorp.com)  
[www.salleycorp.com](http://www.salleycorp.com)  
Tel. +39 0444 550 520  
Fax. +39 0444 550 320